
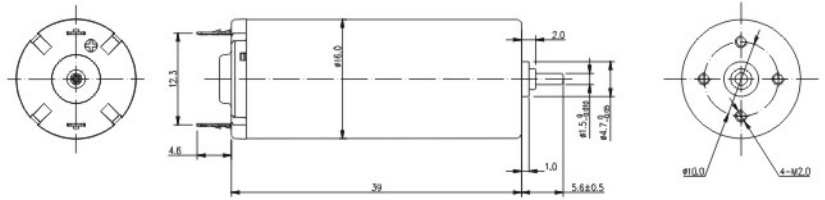



Ø 16mm Metal Brushes



CL1640	UNIT	001	002	003	004
NOMINAL VOLTAGE(额定电压)	V/DC	7.4	24	24	24
NO LOAD SPEED(空载转速)	rpm	11000	6700	8600	6000
RATED SPEED (额定转速)	rpm	9200	4700	7300	4100
NO LOAD CURRENT(空载电流)	mA	50	4	15	5
RATED CURRENT(额定电流)	mA	830	140	200	140
RATED TORQUE(额定转矩)	mNm	4.9	4.9	4.9	4.9
RATED POWER(额定功率)	W	4.72	2.41	3.75	2.10
STALL CURRENT(堵转电流)	A	4.9	0.5	1.3	0.5
STALL TORQUE(堵转转矩)	mNm	29.9	16.4	32.4	15.5
MAX. EFFICIENCY(最大效率)	%	81	79	75	76
TERMINAL RESISTANCE(端子电阻)	Ω	1.5	48.0	18.5	53.2
TORQUE CONSTANT(转矩常数)	mNm/A	6.1	32.8	24.9	34.3
SPEED CONSTANT(速度常数)	rpm/V	1486	279	358	250
WEIGHT(重量)	g	45	45	45	45

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	85°C
MAX PERMISSIBLE SPEED	13000rpm
MAX AXIAL LOAD	0.8N
MAX RADIAL LOADING	1.5N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE COMMUTATOR SEGMENTS	5

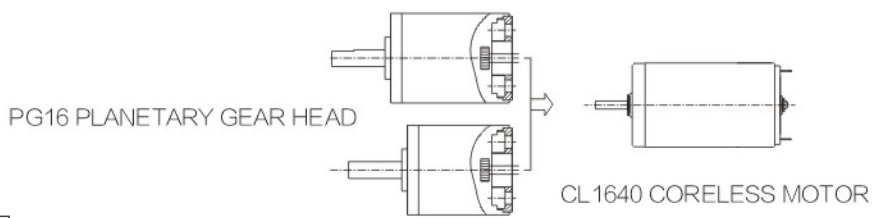

Application

Grinder(打磨机) , Hand Tools手持工具