


∅ 30mm Graphite Brushes

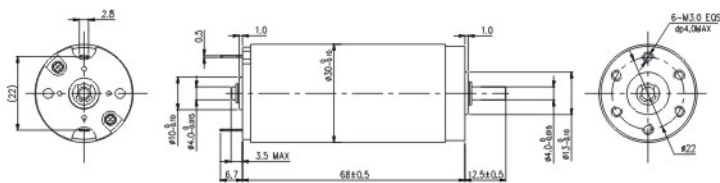

CL3070	UNIT	001	002	003	004
NOMINAL VOLTAGE(额定电压)	V/DC	36	36		
NO LOAD SPEED(空载转速)	rpm	14600	13000		
RATED SPEED (额定转速)	rpm	14100	12180		
NO LOAD CURRENT(空载电流)	mA	160	110		
RATED CURRENT(额定电流)	mA	1900	1630		
RATED TORQUE(额定转矩)	mNm	39.2	39.2		
RATED POWER(额定功率)	W	57.9	50.0		
STALL CURRENT(堵转电流)	A	45	15.6		
STALL TORQUE(堵转转矩)	mNm	1150	623		
MAX. EFFICIENCY(最大效率)	%	81	78		
TERMINAL RESISTANCE(端子电阻)	Ω	0.8	2.3		
TORQUE CONSTANT(转矩常数)	mNm/A	25.6	39.9		
SPEED CONSTANT(速度常数)	rpm/V	406	361		
WEIGHT(重量)	g	200	200		

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	125°C
MAX PERMISSIBLE SPEED	15000rpm
MAX AXIAL LOAD	3.0N
MAX RADIAL LOADING	15N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE COMMUTATOR SEGMENTS	13

