


∅ 32mm Graphite Brushes

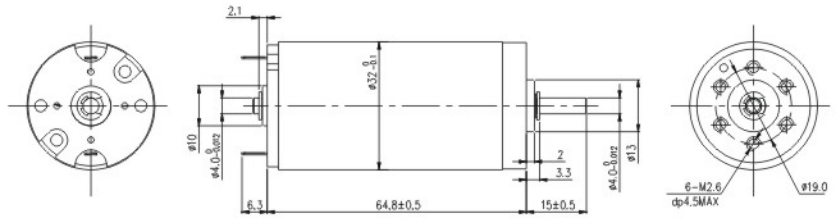

CL3265	UNIT	001	002	003	004
NOMINAL VOLTAGE(额定电压)	V/DC	24	24	36	
NO LOAD SPEED(空载转速)	rpm	6440	4400	8850	
RATED SPEED (额定转速)	rpm	4930	3200	7950	
NO LOAD CURRENT(空载电流)	mA	77	50	115	
RATED CURRENT(额定电流)	mA	1339	550	2100	
RATED TORQUE(额定转矩)	mNm	47.04	29.4	78.4	
RATED POWER(额定功率)	W	24.3	9.9	65.3	
STALL CURRENT(堵转电流)	A	5.7	1.9	20.9	
STALL TORQUE(堵转转矩)	mNm	200.6	107.8	770.9	
MAX. EFFICIENCY(最大效率)	%	73	72	75	
TERMINAL RESISTANCE(端子电阻)	Ω	4.18	12.5	1.72	
TORQUE CONSTANT(转矩常数)	mNm/A	34.9	56.7	36.8	
SPEED CONSTANT(速度常数)	rpm/V	268	187	246	
WEIGHT(重量)	g	225	225	225	

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	125°C
MAX PERMISSIBLE SPEED	12000rpm
MAX AXIAL LOAD	5.0N
MAX RADIAL LOADING	25N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE COMMUTATOR SEGMENTS	13

