



# Ø 24mm Brushless

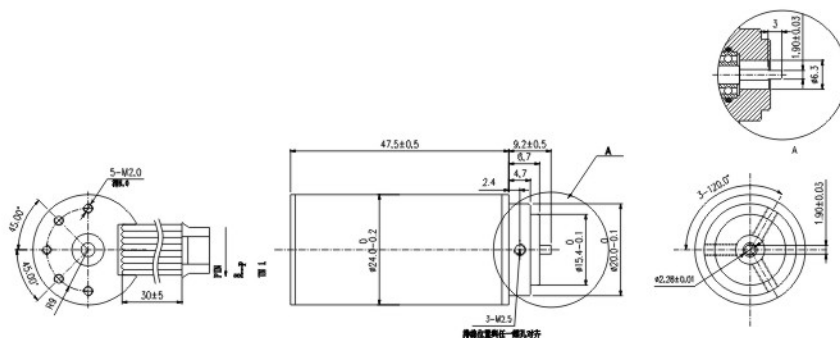

CB2447	UNIT	001	002	003	004
RATED VOLTAGE(额定电压)	V/DC	30			
RATED SPEED(额定转速)	RPM	15800			
NO LOAD SPEED(空载转速)	RPM	18000			
NO LOAD CURRENT(空载电流)	mA	320			
RATED CURRENT(额定电流)	mA	1500			
RATED TORQUE(额定转矩)	mN.m	15			
RATED POWER(额定功率)	W	24.8			
MAX EFFICIENCY(最大效率)	%	75			
RESISTANCE PHASE TO PHASE	OHM	2.4			
TORQUE CONSTANT(转矩常数)	mN.m/A	15.8			
SPEED CONSTANT(速度常数)	rpm/V	600			
WEIGHT(重量)	g	105			

## SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	85°C
MAX PERMISSIBLE SPEED	30000rpm
MAX AXIAL LOAD	2.0N
MAX RADIAL LOADING	10N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE PHASES	3

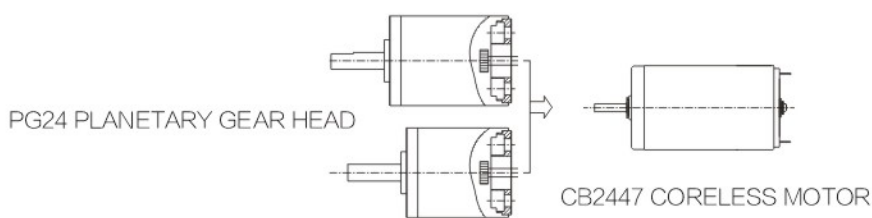

**Application**  
Powertools by Hand (电动工具)