
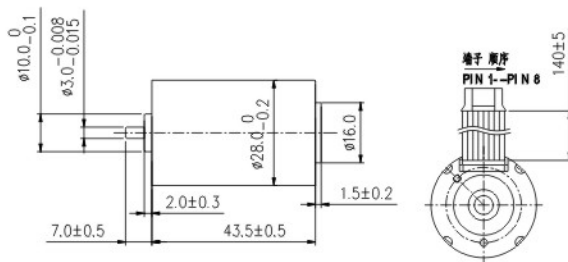



# Ø 28mm Brushless



CB2840	UNIT	001	002	003	004
RATED VOLTAGE(额定电压)	V/DC	24			
RATED SPEED(额定转速)	RPM	9200			
NO LOAD SPEED(空载转速)	RPM	11000			
NO LOAD CURRENT(空载电流)	mA	220			
RATED CURRENT(额定电流)	mA	950			
RATED TORQUE(额定转矩)	mN.m	12			
RATED POWER(额定功率)	W	11.6			
MAX EFFICIENCY(最大效率)	%	73			
RESISTANCE PHASE TO PHASE	OHM	3.7			
TORQUE CONSTANT(转矩常数)	mN.m/A	20			
SPEED CONSTANT(速度常数)	rpm/V	458			
WEIGHT(重量)	g	145			

## SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	85°C
MAX PERMISSIBLE SPEED	20000rpm
MAX AXIAL LOAD	3.0N
MAX RADIAL LOADING	12N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE PHASES	3

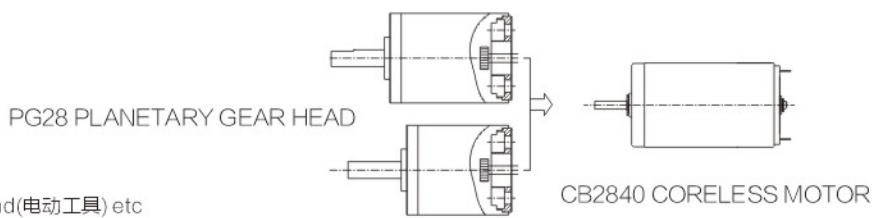

**Application**  
Gas Pump(气泵) Powertools by Hand(电动工具) etc