


Ø 16mm Brushless

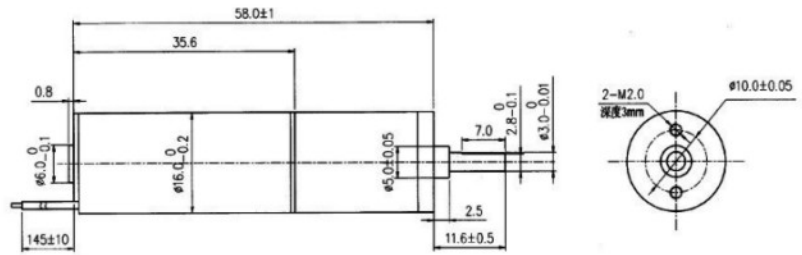

CB1636IN-16GA(1:84)	UNIT	001	002	003	004
RATED VOLTAGE(额定电压)	V/DC	8			
RATED SPEED(额定转速)	RPM	170			
NO LOAD SPEED(空载转速)	RPM	210			
NO LOAD CURRENT (空载电流)	mA	220			
RATED CURRENT (额定电流)	mA	1100			
RATED TORQUE (额定转矩)	mN.m	80			
RATED POWER(额定功率)	W	1.42			
MAX EFFICIENCY (最大效率)	%	60			
RESISTANCE PHASE TO PHASE	OHM	1.03			
WEIGHT (重量)	g	120			

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20~55℃
MAX PERMISSIBLE WINDING TEMPERATURE	85℃
MAX PERMISSIBLE SPEED	3000rpm
MAX AXIAL LOAD	2.0N
MAX RADIAL LOADING	8.0N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE PHASES	3

