



∅ 22mm Metal Brushes

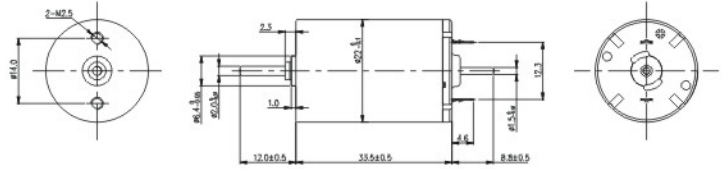

CL2233	UNIT	001	002	003	004
NOMINAL VOLTAGE(额定电压)	V/DC	6	12	20	24
NO LOAD SPEED(空载转速)	rpm	3800	5000	6000	4730
RATED SPEED (额定转速)	rpm	3000	3640	3680	3380
NO LOAD CURRENT(空载电流)	mA	15	8	5	4
RATED CURRENT(额定电流)	mA	500	300	370	214
RATED TORQUE(额定转矩)	mNm	3.92	6.86	12.25	9.8
RATED POWER(额定功率)	W	1.23	2.61	4.72	3.47
STALL CURRENT(堵转电流)	A	1.9	1.1	1.1	0.7
STALL TORQUE(堵转转矩)	mNm	18.6	25.2	31.7	34.3
MAX. EFFICIENCY(最大效率)	%	74	75	79	78
TERMINAL RESISTANCE(端子电阻)	Ω	3.1	11.2	17.5	34.7
TORQUE CONSTANT(转矩常数)	mNm/A	9.6	23.5	27.7	49.6
SPEED CONSTANT(速度常数)	rpm/V	633	417	300	197
WEIGHT(重量)	g	60	60	60	60

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	85°C
MAX PERMISSIBLE SPEED	11000rpm
MAX AXIAL LOAD	1.0N
MAX RADIAL LOADING	2.8N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE COMMUTATOR SEGMENTS	5

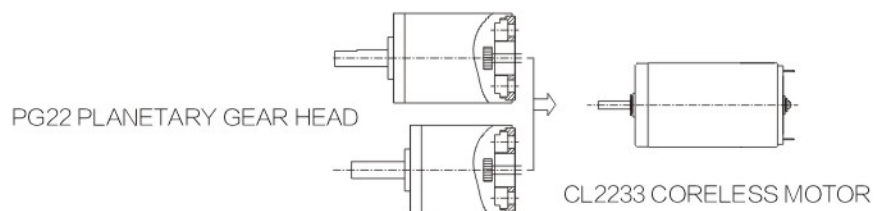

Application

Electric Curtain(电动窗帘) etc