


∅ 22mm Metal Brushes

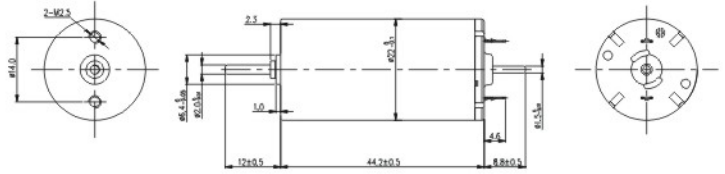

CL2244	UNIT	001	002	003	004
NOMINAL VOLTAGE(额定电压)	V/DC	24	12	24	
NO LOAD SPEED(空载转速)	rpm	5500	5400	6500	
RATED SPEED (额定转速)	rpm	4360	4200	5800	
NO LOAD CURRENT(空载电流)	mA	10	35	15	
RATED CURRENT(额定电流)	mA	390	750	290	
RATED TORQUE(额定转矩)	mNm	14.7	14.7	9.8	
RATED POWER(额定功率)	W	6.71	6.46	5.95	
STALL CURRENT(堵转电流)	A	1.9	3.3	2.5	
STALL TORQUE(堵转转矩)	mNm	70.8	66.2	91	
MAX. EFFICIENCY(最大效率)	%	78	82	79	
TERMINAL RESISTANCE(端子电阻)	Ω	13.5	3.6	9.5	
TORQUE CONSTANT(转矩常数)	mNm/A	37.3	20.1	36.4	
SPEED CONSTANT(速度常数)	rpm/V	229	450	271	
WEIGHT(重量)	g	70	70	70	

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	85°C
MAX PERMISSIBLE SPEED	8000rpm
MAX AXIAL LOAD	1.2N
MAX RADIAL LOADING	3.2N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE COMMUTATOR SEGMENTS	5

