



# ∅ 20mm Brushless

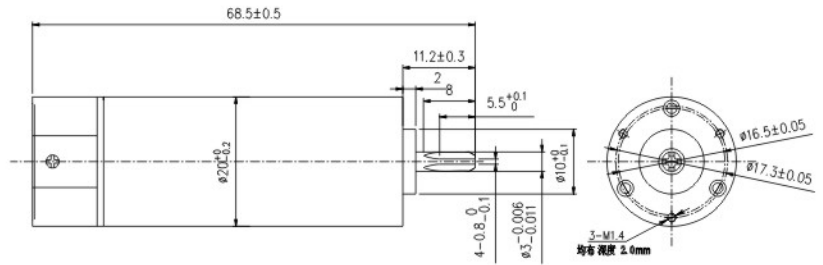

| CB2060                    | UNIT   | 001   | 002 | 003 | 004 |
|---------------------------|--------|-------|-----|-----|-----|
| RATED VOLTAGE(额定电压)       | V/DC   | 36    |     |     |     |
| RATED SPEED(额定转速)         | RPM    | 47000 |     |     |     |
| NO LOAD SPEED(空载转速)       | RPM    | 50000 |     |     |     |
| NO LOAD CURRENT(空载电流)     | mA     | 150   |     |     |     |
| RATED CURRENT(额定电流)       | mA     | 1800  |     |     |     |
| RATED TORQUE(额定转矩)        | mN.m   | 10    |     |     |     |
| RATED POWER(额定功率)         | W      | 49.2  |     |     |     |
| MAX EFFICIENCY(最大效率)      | %      | 75    |     |     |     |
| RESISTANCE PHASE TO PHASE | OHM    | 1.33  |     |     |     |
| TORQUE CONSTANT(转矩常数)     | mN.m/A | 6.8   |     |     |     |
| SPEED CONSTANT(速度常数)      | rpm/V  | 1388  |     |     |     |
| WEIGHT(重量)                | g      | 92    |     |     |     |

## SPECIFICATION

|                                     |            |
|-------------------------------------|------------|
| AMBIENT TEMPERATURE RANGE           | -20 ~ 55°C |
| MAX PERMISSIBLE WINDING TEMPERATURE | 85°C       |
| MAX PERMISSIBLE SPEED               | 60000rpm   |
| MAX AXIAL LOAD                      | 2.0N       |
| MAX RADIAL LOADING                  | 10N        |
| NUMBER OF THE POLE PAIR             | 1          |
| NUMBER OF THE PHASES                | 3          |

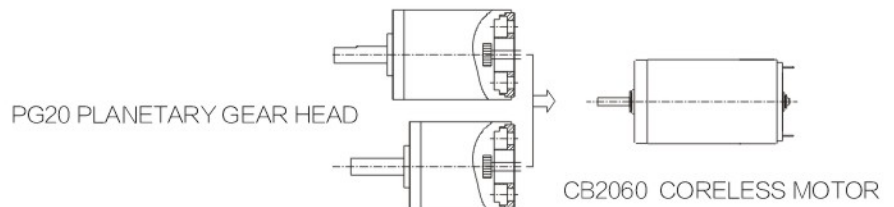

### Application

Grinder(打磨机) etc