


# Ø 24mm Brushless

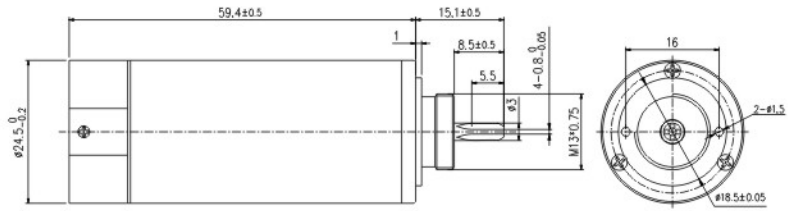


CB2460	UNIT	001	002	003	004
RATED VOLTAGE(额定电压)	V/DC	36			
RATED SPEED(额定转速)	RPM	47000			
NO LOAD SPEED(空载转速)	RPM	50000			
NO LOAD CURRENT(空载电流)	mA	160			
RATED CURRENT(额定电流)	mA	2000			
RATED TORQUE(额定转矩)	mN.m	12			
RATED POWER(额定功率)	W	59.1			
MAX EFFICIENCY(最大效率)	%	80			
RESISTANCE PHASE TO PHASE	OHM	0.9			
TORQUE CONSTANT(转矩常数)	mN.m/A	6.8			
SPEED CONSTANT(速度常数)	rpm/V	1388			
WEIGHT(重量)	g	125			

## SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20~55℃
MAX PERMISSIBLE WINDING TEMPERATURE	85℃
MAX PERMISSIBLE SPEED	60000rpm
MAX AXIAL LOAD	2.0N
MAX RADIAL LOADING	10N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE PHASES	3

PG24 PLANETARY GEAR HEAD

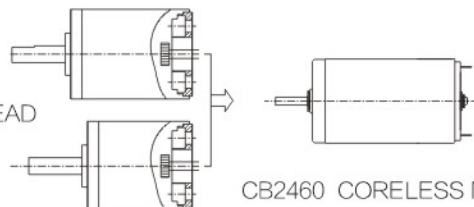

CB2460 CORELESS MOTOR

### Application

grinder(打磨机) without hall sensor