


# Ø 28mm Brushless

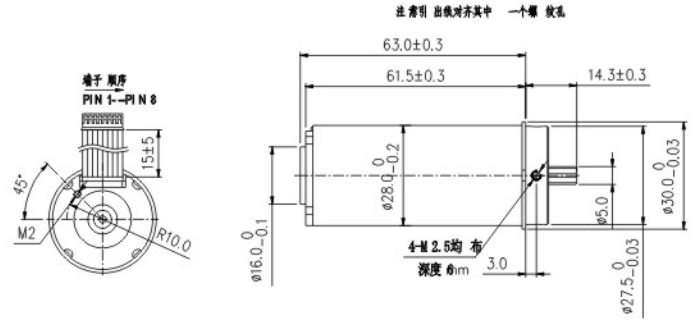


CB2862	UNIT	001	002	003	004
RATED VOLTAGE(额定电压)	V/DC	30	24		
RATED SPEED(额定转速)	RPM	14000	12500		
NO LOAD SPEED(空载转速)	RPM	16000	14500		
NO LOAD CURRENT(空载电流)	mA	350	320		
RATED CURRENT(额定电流)	mA	2300	3300		
RATED TORQUE(额定转矩)	mN.m	30	40		
RATED POWER(额定功率)	W	44.0	52.4		
MAX EFFICIENCY(最大效率)	%	79	80		
RESISTANCE PHASE TO PHASE	OHM	1	0.8		
TORQUE CONSTANT(转矩常数)	mN.m/A	17.9	15.8		
SPEED CONSTANT(速度常数)	rpm/V	533	604		
WEIGHT(重量)	g	175	175		

## SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20~55℃
MAX PERMISSIBLE WINDING TEMPERATURE	85℃
MAX PERMISSIBLE SPEED	25000rpm
MAX AXIAL LOAD	3.0N
MAX RADIAL LOADING	12N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE PHASES	3

PG28 PLANETARY GEAR HEAD

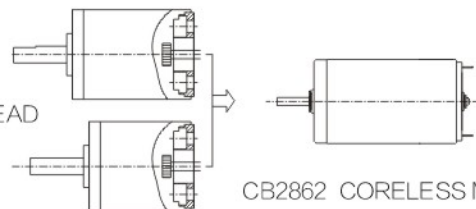

CB2862 CORELESS MOTOR

### Application

Powertools by Hand(电动工具) etc