


∅ 30mm Brushless

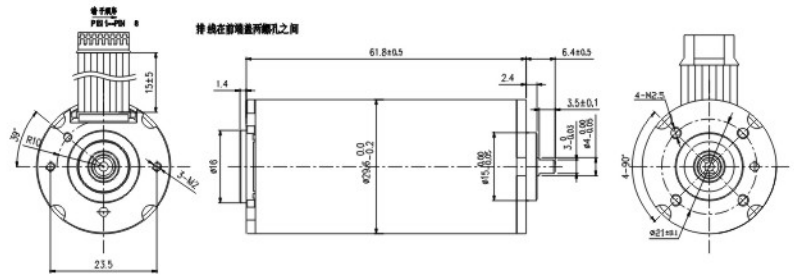

CB3062	UNIT	001	002	003	004
RATED VOLTAGE(额定电压)	V/DC	36			
RATED SPEED(额定转速)	RPM	14000			
NO LOAD SPEED(空载转速)	RPM	16000			
NO LOAD CURRENT(空载电流)	mA	400			
RATED CURRENT(额定电流)	mA	2600			
RATED TORQUE(额定转矩)	mN.m	50			
RATED POWER(额定功率)	W	73.3			
MAX EFFICIENCY(最大效率)	%	79			
RESISTANCE PHASE TO PHASE	OHM	1.3			
TORQUE CONSTANT(转矩常数)	mN.m/A	17.9			
SPEED CONSTANT(速度常数)	rpm/V	533			
WEIGHT(重量)	g	210			

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20~55°C
MAX PERMISSIBLE WINDING TEMPERATURE	85°C
MAX PERMISSIBLE SPEED	25000rpm
MAX AXIAL LOAD	3.0N
MAX RADIAL LOADING	12N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE PHASES	3

