


∅ 36mm Brushless

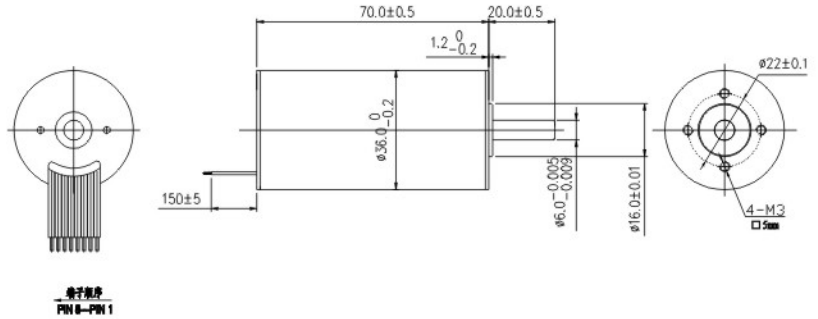

CB3670	UNIT	001	002	003	004
RATED VOLTAGE(额定电压)	V/DC	24	24		
RATED SPEED(额定转速)	RPM	6000	17900		
NO LOAD SPEED(空载转速)	RPM	7200	19000		
NO LOAD CURRENT (空载电流)	mA	300	750		
RATED CURRENT (额定电流)	mA	2500	4100		
RATED TORQUE (额定转矩)	mN.m	80	45		
MAX EFFICIENCY (最大效率)	%	84	85		
RESISTANCE PHASE TO PHASE	OHM	0.96	0.26		
TORQUE CONSTANT (转矩常数)	mN.m/A	31.8	12		
SPEED CONSTANT (速度常数)	rpm/V	300	791		
WEIGHT (重量)	G	350	350		

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20~55℃
MAX PERMISSIBLE WINDING TEMPERATURE	85℃
MAX PERMISSIBLE SPEED	25000rpm
MAX AXIAL LOAD	4.0N
MAX RADIAL LOADING	15N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE PHASES	3

