


PG32MZY31



Typical applications:

Auto shutter, Micro CNC equipment, Central air-conditioning valve, Robots, Towel dispensers, Limelight, Automatic closet bowl special valve, Electric advertising, Angular telescope, Office equipment, Household appliances, Automatic actuator.

Appearance size

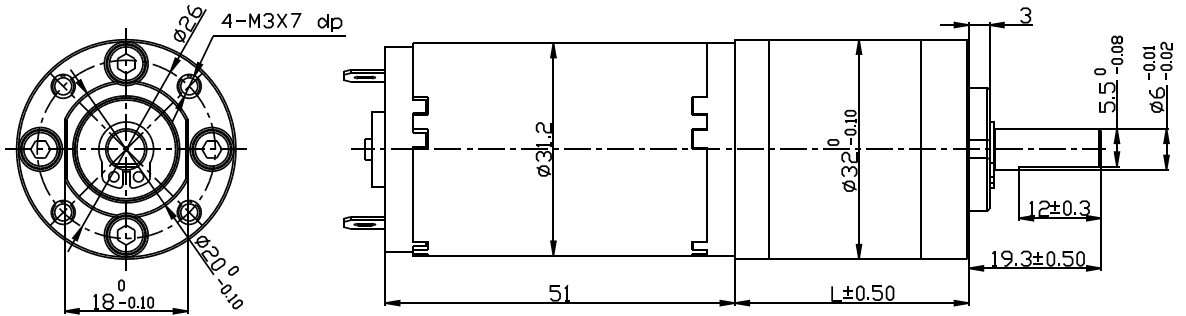

Gearbox data

Number of stages	1 stages reduction	2 stages reduction	3 stages reduction	4stages reduction	5stages reduction
Reduction ratio	4, 4.75	16, 19, 22.5	64, 76, 90, 107,	256, 304, 361, 428, 509,	1024, 1216, 1444, 1715, 2036, 2418,
Gearbox length "L" mm	24	29.1	34.2	39.3	44.4
Max. Running torque	2.0Kgf · cm	3.0Kgf · cm	4.0Kgf · cm	6.0Kgf · cm	10Kgf · cm
Max. Gear breaking torque	6.0Kgf · cm	9.0Kgf · cm	12Kgf · cm	18Kgf · cm	30Kgf · cm
Gearing efficiency	90%	81%	73%	65%	59%

Motor data

Motor name	Rated Volt V	No load		Load torque				Stall torque	
		Current	Speed	Current	Speed	Torque	Output power	Torque	Current
		mA	r/min	mA	r/min	gf · cm	W	gf · cm	mA
31ZY123000	12	≤100	3000	≤400	2200	90	2.0	360	1600
31ZY124500	12	≤150	4500	≤700	3300	130	4.3	520	2700
31ZY126000	12	≤220	6000	≤1200	4500	180	8.0	720	5000
31ZY243000	24	≤60	3000	≤200	2200	90	2.0	360	800
31ZY244500	24	≤90	4500	≤350	3300	130	4.3	520	1300
31ZY246000	24	≤130	6000	≤650	4500	180	8.0	720	2600

- 1、 Please refer to motor 31ZY for the motor graph.
- 2、 After connecting motor and gearbox which is named gearmotor the output torque: motor torque X reduction ratio X gearing efficiency; output speed: motor speed / reduction ratio.

NOTE

- 1、 Gearmotor named methods: e.g. PG32M3112300090K Motor please refer to the motor data 31ZY123000. Gearbox please refer to gearbox data reduction ratio 90. Related to gearmotor output speed and torque please refer to motor data.
- 2、 Motor can be installed with magnetic encoder.
- 3、 Standard output shaft after reducing F 6.0mm. other sizes of the output shaft can make as client request.
- 4、 Chart only for reference, products shall prevail the entity.