



∅ 35mm Graphite Brushes

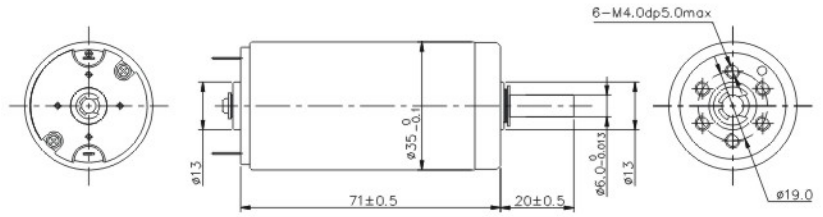

CL3570	UNIT	001	002	003	004
NOMINAL VOLTAGE(额定电压)	V/DC	24	31	42	48
NO LOAD SPEED(空载转速)	rpm	6060	4800	7000	7480
RATED SPEED (额定转速)	rpm	5450	4100	6400	6840
NO LOAD CURRENT(空载电流)	mA	109	49	64	70
RATED CURRENT(额定电流)	mA	1950	1275	1370	1380
RATED TORQUE(额定转矩)	mNm	78.4	78.4	78.4	98
RATED POWER(额定功率)	W	44.7	33.7	52.5	70.2
STALL CURRENT(堵转电流)	A	17.1	8.9	15.0	14.5
STALL TORQUE(堵转转矩)	mNm	778.9	537.6	914.7	1145.4
MAX. EFFICIENCY(最大效率)	%	82	83	79	84
TERMINAL RESISTANCE(端子电阻)	Ω	1.4	3.5	2.8	3.3
TORQUE CONSTANT(转矩常数)	mNm/A	45.4	60.7	61.0	78.7
SPEED CONSTANT(速度常数)	rpm/V	253	155	167	156
WEIGHT(重量)	g	315	315	315	315

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	125°C
MAX PERMISSIBLE SPEED	8000rpm
MAX AXIAL LOAD	5.6N
MAX RADIAL LOADING	28N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE COMMUTATOR SEGMENTS	13

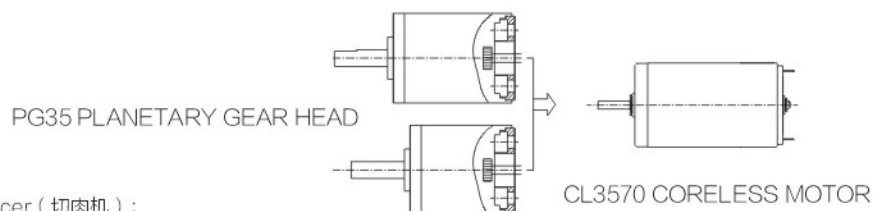

Application

Golfcart(高尔夫球杆推车) Meat Slicer (切肉机) ;
Robot(机器人, 机器人手) Stage Lighting (舞台灯光) etc