


∅ 22mm Metal Brushes

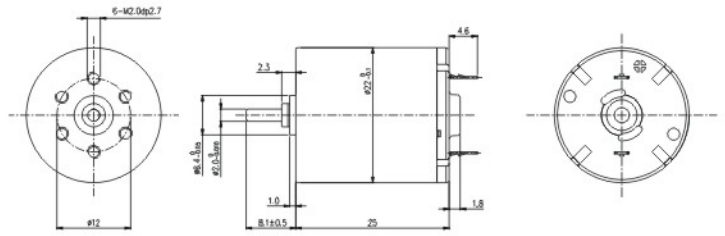

CL2223	UNIT	001	002	003	004
NOMINAL VOLTAGE(额定电压)	V/DC	24			
NO LOAD SPEED(空载转速)	rpm	7800			
RATED SPEED(额定转速)	rpm	6550			
NO LOAD CURRENT(空载电流)	mA	10			
RATED CURRENT(额定电流)	mA	150			
RATED TORQUE(额定转矩)	mNm	2.94			
RATED POWER(额定功率)	W	2.02			
STALL CURRENT(堵转电流)	A	0.6			
STALL TORQUE(堵转转矩)	mNm	18.3			
MAX. EFFICIENCY(最大效率)	%	76			
TERMINAL RESISTANCE(端子电阻)	Ω	39			
TORQUE CONSTANT(转矩常数)	mNm/A	29.8			
SPEED CONSTANT(速度常数)	rpm/V	325			
WEIGHT(重量)	g	45			

SPECIFICATION

AMBIENT TEMPERATURE RANGE	-20 ~ 55°C
MAX PERMISSIBLE WINDING TEMPERATURE	85°C
MAX PERMISSIBLE SPEED	11000rpm
MAX AXIAL LOAD	1.0N
MAX RADIAL LOADING	2.1N
NUMBER OF THE POLE PAIR	1
NUMBER OF THE COMMUTATOR SEGMENTS	5

